

METALİK KASET FİLTRE / METALLIC CASSETTE FILTER

Uygulamalar

- Mutfak havalandırma uygulamalarında gres veya yağ buharı ayırma
- Kaba parçacık tutucu

Özellikler


- Yüksek sıcaklıklara dayanıklılık
- Sağlam yapı
- Yıkanabilir
- Optimize edilmiş işletme maliyeti

Applications

- Grease or oil mist separation in kitchen ventilation applications
- Coarse particle trapper

Highlights

- Resistance to high temperatures
- Robust construction
- Washable
- Optimized operational cost

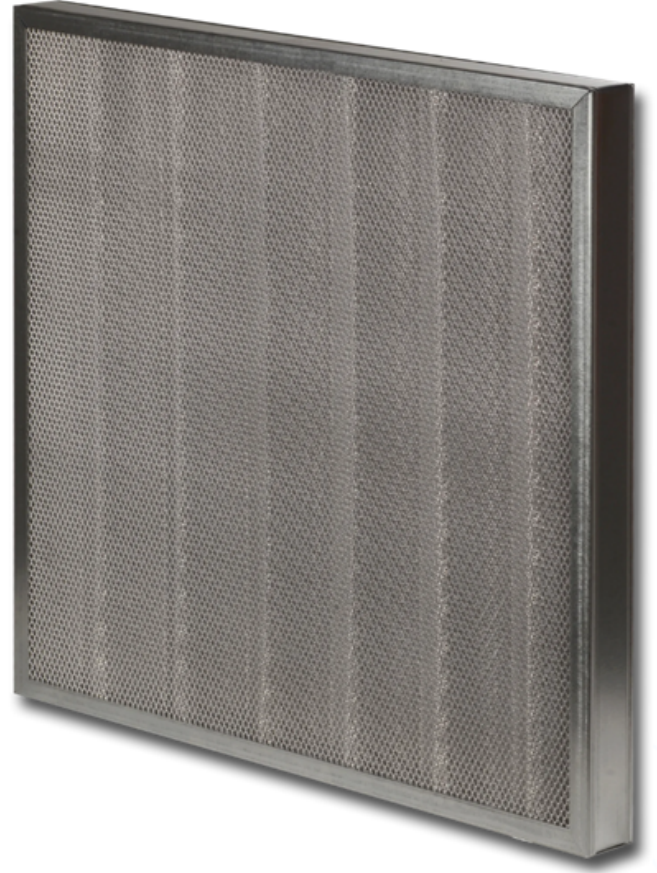

Filter Standard:

ISO16890

Filter class:

ISO Coarse

Media:

Expanded metal, wire mesh
(Aluminium, Galvanized, Stainless Steel)

Frame:

Galvanized, Aluminium,
Stainless Steel

Rec. Final Pressure Drop EN13053:

Initial ΔP +50 Pa or initial ΔP x3
whichever is lower

Max. Operating Temperature:

200° C

Standard depth:

25 - 48mm

Filter Class		Media Material	Dimensions WxHxD (mm)	Nominal Airflow (m³/h)	Initial Pressure Drop (Pa)
EN 779 (cancelled)	ISO 16890				
G2	Coarse 25%	Aluminium	287x287x25	850	90
G2	Coarse 25%	Aluminium	287x592x25	1750	90
G2	Coarse 25%	Aluminium	437x592x25	2600	90
G2	Coarse 25%	Aluminium	592x592x25	3400	90
G2	Coarse 25%	Aluminium	287x287x48	850	65
G2	Coarse 25%	Aluminium	287x592x48	1750	65
G2	Coarse 25%	Aluminium	592x592x48	3400	65
G3	Coarse 40%	Galvanized	287x287x25	850	90
G3	Coarse 40%	Galvanized	287x592x25	1750	90
G3	Coarse 40%	Galvanized	437x592x25	2600	90
G3	Coarse 40%	Galvanized	592x592x25	3400	90
G3	Coarse 40%	Galvanized	287x287x48	850	65
G3	Coarse 40%	Galvanized	287x592x48	1750	65
G3	Coarse 40%	Galvanized	592x592x48	3400	65

"Other dimensions are available on request"
 "Differential Pressure Tolerance ($\pm 10\% + 5$ Pa) or (10 Pa + 5 Pa) whichever is greater"

