

# JEL DOLGULU CONTALI ULPA FİLTRE / ULPA FILTER WITH GEL FILLED GASKET

## Uygulamalar

- Temiz odalar ve LF üniteleri için son kademe filtre
- Hastane
- Mikroelektronik
- Gıda

## Özellikler


- Yüksek kaliteli sıvı jel contalı ( özelliğini koruyan)
- Yüksek kalite cam elyaf medya
- Sızdırmazlık garantili
- Bireysel test sertifikası (EN 1822 – ISO 29463'e göre)
- Optimum hava hız dağılımı

## Applications

- Final filter for cleanrooms and LF Units
- Healthcare
- Microelectronics
- Food & Beverages

## Highlights

- High quality fluid gel gasket (self healing)
- High quality glass fiber media
- Guaranteed leak free
- Individual test certificate (acc. to EN 1822 - ISO 29463)
- Optimized velocity distribution

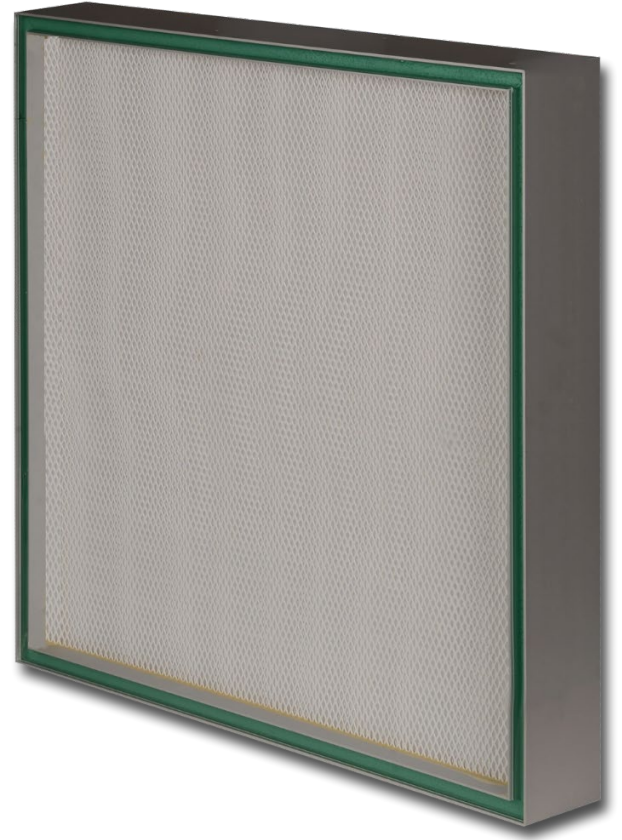

Filter Standard:	EN 1822 and ISO 29463	Max. Operating Temperature:	80°C
Filter Class:	U15 -U16 - U17	Faceguard:	Aluminium sheet, powder coated
Media:	High quality glass fiber	Gasket:	Gel
Frame:	Anodized extruded aluminium	Sealing Compound:	Two component polyurethane
Rec. Final Pressure Drop:	Initial pressure drop x2, (max. 600 Pa)	Separator:	Hotmelt

Filter Class		Dimensions WxHxD (mm)	Filtration Area (m <sup>2</sup> )	Pleat Height (mm)	Nominal Airflow (m <sup>3</sup> /h)	Initial Pressure Drop (Pa)
EN 1822	ISO 29463					
U15	ISO 55 U	610x610x80	10	42	600	140
U15	ISO 55 U	610x1220x80	20	42	1200	140
U15	ISO 55 U	610x610x91	12	55	600	130
U15	ISO 55 U	610x1220x91	24	55	1200	130
U15	ISO 55 U	610x610x104	14	68	600	115
U15	ISO 55 U	610x1220x104	28	68	1200	115
U15	ISO 55 U	610x610x128	20	92	600	100
U15	ISO 55 U	610x1220x128	40	92	1200	100
U15	ISO 55 U	610x610x150	23,5	115	600	90
U15	ISO 55 U	610x1220x150	47	115	1200	90

"Other dimensions are available on request"  
 "Differential Pressure Tolerance ±10%"

